

WOODS **ESTATE SERIES**

compact tractor attachments

An entire line
of attachments
designed specifically
for subcompact and
compact tractors.



WOODS[®]
Tested. Proven. Unbeatable.™

An entire line of attachments designed specifically for subcompact and compact tractors.

Face it, you got the tractor to make work easier; now start – and more importantly – finish all of those projects quickly with this collection of Woods' Estate Series tools.

Tested. Proven. Unbeatable.

It's been said that reputation is everything. Since 1946, Woods has built its reputation on producing tools that work great and last a long time. Rest easy knowing your Woods Estate Series attachments will deliver high performance and durability for years.

Easy to attach and operate, the Estate Series offers these key features:

- ASAE Quick Hitch compatibility
- Welded to American Welding Society standards
- Tested in rigorous real-life conditions and in compliance with recommended industry safety standards



Insist on genuine WoodsCare™ parts for genuine Woods performance.

Loader

The 1005 loader was designed with your subcompact tractor in mind. It mounts and dismounts easily, operates with an undermount mower attached, and is available in a color to match your tractor. This "mini workhorse" really performs, whether you're moving landscape plants, removing snow, or handling up to 610 pounds of material.



Round back bucket

Round back bucket dumps more easily and completely, making each load more productive.



Specifications

LOADER

	1005
Lift capacity	610 lbs.
Lift height	73"
Bucket capacity	6.0 cu. ft.
Bucket cylinder	single
Approximate weight	375 lbs.
Valve type	two function
Bucket	48" round back
Parking stands	built-in
Tractor horsepower	up to 25

Valve stays with tractor

The hydraulic valve and joystick mount on the tractor allowing you to easily switch between front-mounted hydraulic attachments.

Choose a loader color to match your tractor

Available painted in colors to match your tractor. See your Woods dealer for details.

Kubota® Orange



New Holland® Vibrant Blue



Massey Ferguson® Red



Case IH® Red



John Deere® Green



Cub Cadet® Yellow



Groundbreaker-X™ Backhoe

- **Extra durable** – heavy-duty, construction grade Gannon® bucket
- **Extra simple** – easy on/easy off, no tools required
- **Extra capacity** – three bucket sizes available with greater capacity than any others on the market
- **Extra ability** – curved boom reaches over obstacles, with better visibility and less repositioning than a straight boom
- **Extra strong** – “box section” design adds strength without weight, for more lifting power

Combine an excavator-style curved boom, construction grade Gannon bucket, and Woods' unique easy on/easy off mounting system. That's the Estate Series Groundbreaker-X™ backhoe for subcompact tractors. A powerful digger that's simple to service, requires no tools to attach and detach, and has a greater bucket capacity than anything else around.



Extra ability with curved boom

Excavator style curved boom reaches over objects with better visibility and less repositioning than with a straight boom.



Extra simple on/off

With Woods' unique easy on/easy off mounting system, you can attach or detach the backhoe in about three minutes – no tools required.



Extra durability and capacity

Choose from three heavy-duty, construction grade Gannon buckets: 8-inch trenching, 12-inch all-purpose, 16-inch max-capacity.

Choose a backhoe color to match your tractor

Available painted in colors to match your tractor. See your Woods dealer for details.



Specifications

BACKHOE

	BH6000 w/ 8" bucket	BH6000 w/ 12" & 16" bucket
Digging depth - 2' flat bottom	74"	72.5"
Digging depth - 8' flat bottom	47"	44"
Reach from swing pivot	98"	96.3"
Loading height	54"	54.5"
Loading reach	33.5"	35.5"
Transport height	60"	60"
Swing arc	150°	150°
Bucket rotation	180°	180°
Stabilizer spread - up (transporting)	51"	51"
Stabilizer spread - down (operating)	77.5"	77.5"
Leveling angle	12°	12°
Ground clearance at main frame	10.5"	10.5"
Rated pressure	1780 psi	1780 psi
Bucket digging force	2025 lbs.	2200 lbs.
Dipperstick digging force	1150 lbs.	1180 lbs.
Boom cylinder diameter	2.25"	2.25"
Dipperstick cylinder diameter	2.25"	2.25"
Bucket cylinder diameter	2.25"	2.25"
Swing cylinder diameter	2.5"	2.5"
Stabilizer cylinder diameter	2.25"	2.25"
Shipping weight without bucket	730 lbs.	730 lbs.
Tractor horsepower range	18 - 24 hp	18 - 24 hp
Bucket cutting edge	1/2" beveled steel	1/2" beveled steel
Bucket teeth	Hensley® bolt-on	Hensley® bolt-on
Bucket capacity - 8" trenching	0.63 cubic feet	-
Bucket capacity - 12" all-purpose	-	0.90 cu. ft.
Bucket capacity - 16" max-capacity	-	1.31 cu. ft.

Rear discharge finish mower

Now you can add a manicured lawn to your tractor's list of accomplishments. A 54-inch cutting width allows the mower to cover the tire tracks of the tractor, reducing mowing time and improving cut quality and appearance.



Specifications

FINISH MOWER

	RDC54
Cutting width	54"
Cutting height range	1" to 4-1/2"
Overall width	55.16"
Overall length	51.65"
Weight*	401 lbs.
Tractor horsepower	15 - 25 hp
Tractor PTO Speed	540 rpm
Hitch	limited cat. 1
Driveline	cat. 3
Gearbox horsepower	25
Belt	"B" section
Blades	(3) 1/4" x 2 1/2"
Number of blade spindles	3
Blade tip speed	16,200 fpm
Blade overlap	1"
Deck thickness	10 gauge
Discharge	rear
Rear chain shielding	optional
Front anti-scalp roller	optional
Caster wheels	
Pneumatic (standard)	3.5 x 4 x 10
Solid rubber (optional)	3.25 x 10

* Note: All Woods RD Series finish mower models pass all applicable safety standards for thrown object and blade contact without chain shielding. However, if these units will be used in areas where the possibility of thrown objects could be hazardous to persons or property, it is strongly recommended that the optional chain shielding be used for extra protection.

*Approximate operating weight: with pneumatic tires, no chain shielding

Specifications

ROTARY CUTTER

	RCC42
Cutting width	42"
Cutting height range	1 - 9"
Cut capacity	1"
Blade tip speed	11,400 fpm
Approximate weight	350 lbs.
Cutting deck and side frame thickness	11 gauge
Front and rear shielding	standard
Tailwheel	4" x 16" solid rubber
Tractor hitch	cat. 1
Tractor horsepower	15 - 30 hp
Gearbox horsepower	50 hp

Single spindle rotary cutter

This single spindle rotary cutter mows weeds and light brush up to one inch in diameter in pastures, trails and gardens. Deep, sturdy side frames and a smooth, sloped deck that sheds water and debris are just two of the quality features that ensure years of worry-free performance.



Specifications

REAR BLADE

	RBC60
Moldboard length	59"
Moldboard height	9.7"
Moldboard thickness	7 gauge
Approximate weight	160 lbs.
Pivot, angle	360°, 5 fwd-5 rev
Offset	12" left or right
Skid shoes	optional
ASAE Quick Hitch compatible	yes
Parking stand	standard
Tractor hitch	cat. 0, limited 1, & 1
Tractor horsepower	up to 25 hp

Rear blade

Our rear blade creates a smooth clean surface whether it's landscaping, grading, or removing snow. Full-radius moldboard and reversible beveled cutting edge allow material to flow freely from the blade.



Shown with optional skid shoes.



Box scraper

The utility box scraper features a nine cubic-foot capacity box and twin 1/2 x 6-inch reversible beveled cutting edges. This compact scraper makes short work of grading and leveling jobs on lanes, in pastures, and around gardens.

Specifications

BOX SCRAPER

	GBC48
Working width	48"
Capacity	9 cu. ft.
End plate thickness	7 gauge
Cutting edges	(2) 1/2" x 6" reversible
Scarifiers	(4) adjustable 3 position
Approximate weight	550 lbs.
ASAE Quick Hitch compatible	yes
Tractor hitch	cat. 0, limited 1, & 1
Tractor horsepower	up to 25 hp

Specifications

LANDSCAPE RAKE

	LRC60
Working width	60"
Approximate weight	220 lbs.
Rake angle positions	5 forward, 5 reverse
Angle increments	15°
Tines	5/16" x 1" spring-steel
Gauge wheels	optional
ASAE Quick Hitch compatible	yes
Tractor hitch	cat. 0, limited 1, & 1
Tractor horsepower	up to 25 hp

Landscape rake

The landscape rake handles gravel, dirt, or sand, producing a flat, even grade. This compact, yet durable, rake features sturdy 5/16 x 1-inch tines, and includes a parking stand.



Shown with optional gauge wheels.



Post hole digger

Heavy-duty welded construction, a rugged gearbox with tapered roller bearings, spring-loaded seals, and hard surfaced, high-carbon, alloy steel teeth offer the durability you need for big or small jobs whatever the soil conditions. Available with a range of auger bit diameters to meet a variety of needs – whether it's hard rocky ground for fence posts or softer more fertile soil for planting trees and shrubs. Options include parking stand, auger extension, semi-double flight augers, and a down-pressure kit.

Specifications

POST HOLE DIGGER

PHD25

Drive type	gearbox
Tractor PTO speed	540 rpm
Approximate weight	149 lbs.
Tractor hitch	limited cat. 1 & 1
Tractor horsepower	15-25 hp
Positioning handle	standard



The right bit

Standard on every auger, a fish tail center point helps pull the bit into the ground.

Standard Auger Bits

Size – Diameter x Length

6" x 30"	standard-duty
9" x 30"	standard-duty
12" x 30"	standard-duty
12"	auger extension



Tillers

These tillers leave a smooth, cultivated finish whether you're re-tilling last year's garden or breaking into hard, compacted sod. Rugged, steel tines can rip nearly seven inches into the toughest ground. Adjustable rear tailgate "floats" over obstructions and protects against flying dirt and debris. A PTO slip clutch offers superior protection to the drive system.



Specifications

TILLER

	GTC40	GTC52	GTC60
Working width	39"	51"	59"
Maximum tilling depth	6.80"	6.80"	6.80"
Approximate weight	373 lbs.	429 lbs.	472 lbs.
Drive type	#80 chain	#80 chain	#80 chain
Number of blades/flange	20/5	24/6	28/7
Parking stand	yes	yes	yes
ASAE Quick Hitch compatible	yes	yes	yes
Tractor hitch	limited cat. 1 & 1	cat. 1	cat. 1
Tractor horsepower	15 – 20 hp	20 – 30 hp	25 – 30 hp

Power rake

Designed with a heavy frame and large bearing drive, the Woods power rake provides years of performance in tough conditions. Use it for jobs ranging from preparing landscape seed beds to removing rocks and debris on construction grading projects.

- Self-adjusting clutch with self-tensioning chain drive system
- Patented power roller system with carbide tips pulverizes tough, compacted soil into a smooth grade in a single pass
- Specifically designed for subcompact and compact tractors
- For the homeowner with a large estate, ranch, farm, or other property requiring landscape or grading preparation



Roll-back barrier

New roll-back barrier on tractor-mounted models offers easy adjustment in different soil conditions to allow for the best possible seed bed and exceptionally smooth grade.

Specifications

POWER RAKES

	TPR6000-2
Working width	60"
Tractor horsepower	16-22 hp
Tractor PTO speed	540 rpm
Angle adjustment increments	15°
Number pins per roller	88
Approximate weight	550 lbs.
Tractor hitch	limited cat. 1 & 1

Pulverizer

The Gill® professional-grade pulverizer loosens, levels, and pulverizes a wide variety of materials. The 20A148 features tough H-beam construction with heat-treated steel pins welded into the roller for years of superior performance.

- Rigid, 10-inch H-beam construction provides weight of 49 pounds per foot
- Two, 150-pound compression springs force roller pins into the soil for deep penetration and constant contact
- 5/8 x 8-inch hardened steel spikes break up even hard-packed soil



Specifications

PULVERIZER

	20A148
Working width	48"
Overall width	54"
Overall height	36"
Depth, front to back	28.3"
Approximate weight	480 lbs.
Scarifying teeth-front	(9) 5/8" x 8", alloy steel
Scarifying teeth-rear	(8) 5/8" x 8", alloy steel
Bearings	1" self-aligning
Roller pins	3/8" x 1-1/8", hardened pins
H-beam dimensions	10" x 10", 49 lbs-ft.
Springs	(2) 150 lbs. compression
ASAE Quick Hitch compatible	yes
Tractor hitch	limited cat. 1 & 1
Tractor horsepower	up to 45 hp

Top quality attachments and genuine replacement parts for the agricultural, landscape, and light construction markets.



More than Mowers

Woods is more than a mower company. We're the largest independent supplier of top quality attachments and replacement parts.


Woods loaders, backhoes, box blades, bearings, belts, and yes, mowers, are sold under the industry's most recognized brand names including Woods®, Alitec®, Gill®, and Gannon®.



Built to Last

Many claim to have quality products. Few can prove it. Simply stated, we make attachments that are proven to endure years of hard work. It's a reputation we've earned during nearly 60 years in the industry.

Our products are welded to American Welding Society standards, tested in rigorous real-life conditions, and in compliance with recommended industry safety standards.

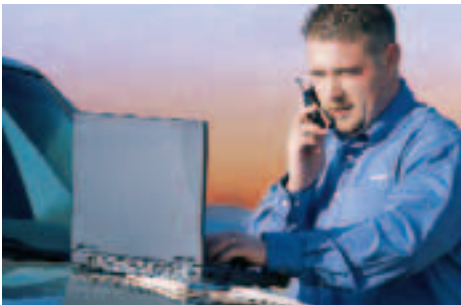

Nationwide Dealer Support

Behind every Woods product is a network of qualified Woods dealers, offering personal attention and expert advice. Behind every dealer is the entire resources of Woods Equipment Company, so you're never more than two steps away from the original equipment manufacturer.



Quality Care for Your Woods Products

Woods™
care
GENUINE PARTS

We're committed to building equipment that lasts. To help you maintain that level of quality and performance, we offer WoodsCare™ genuine replacement parts, equipment finishes, and lubricants. You'll never have to settle for "will fit" parts again. Quality care for your Woods equipment has never been easier.



Woods – Then and Now

Woods has been building quality attachments since 1946, when the Wood brothers built the first successful tractor-mounted rotary cutter. Through the years we have remained focused on building lasting products to yield lasting customers. Farmers, landscape and construction professionals, estate owners, and many others choose Woods products for their durability and performance.

WOODS®

Tested. Proven. Unbeatable.™

Woods Equipment Company 2606 South Illinois Route 2, PO Box 1000, Oregon, Illinois 61061 tel 866-TO-WOODS (866-869-6637) www.WoodsEquipment.com

Warning! Some illustrations may show safety shields removed to provide a better view. Equipment should never be operated with any safety shield removed. Some machines in this brochure may be shown with optional equipment. Always operate machines in accordance with supplied operator's manuals. ©2004 WEC Company. All rights reserved. WOODS, the Woods logo, "Tested. Proven. Unbeatable.", Alitec, Estate Series, Gannon, Gill, Groundbreaker, Heritage, and WoodsCare are trademarks of Woods Equipment Company. All other trademarks, trade names, or service marks not owned by Woods Equipment Company that appear in this brochure are the property of their respective companies or mark holders. Specifications subject to change without notice. B-08023-PR (Rev. 10/04)